


VisioCablePro®

# SWITCH NOW TO OUR INTUITIVE MEASUREMENT SOFTWARE\*

# VELOX

Highly complex standard-compliant image processing – simply with one click

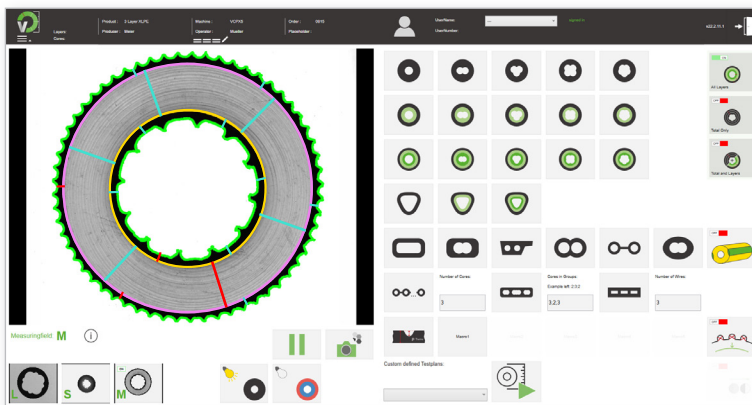

## Your benefits at a glance

- State-of-the-art image processing algorithms
- Smart, self-explanatory operation
- Newest and important standards from the cable industry integrated, e. g. EN 50396, IEC 60811 (-201; -202; -203), LV112 (A Factor), ICEA S-94-649
- Ultra-modern design
- Tolerance-bound test plans
- Remote support possible
- Reports on Excel basis

## Thats what our customers say

"I am completely pleased with the ergonomics and functionality of the program, the operators find it easy to use and the measurement is faster and more accurate. This technical realization exceeds my expectations."

Mounir Pepouore-Ndam  
ACOME France

Div.	#	Prod. N.	Feat. N.	RProc.	Spec. SN	Lay. N.	Value	low Tol.	up Tol.	Unit SN	Com.
Part No.: 1											
Production Step: Coat											
Specification: no specification											
Layer: 01 - Outerlayer											
01	1	Coat	min Wallthickness	VCP	---	01 - Outerlayer	0.8643			mm	
01	2	Coat	avg Wallthickness	VCP	---	01 - Outerlayer	0.9290			mm	
01	3	Coat	Wallthickness max	VCP	---	01 - Outerlayer	0.9590			mm	
01	4	Coat	avg outer Diameter (Contur)	VCP	---	01 - Outerlayer	13.3874			mm	
01	5	Coat	inner Diameter (WPs)	VCP	---	01 - Outerlayer	11.5347			mm	
01	6	Coat	Concentricity (mm/100mm)	VCP	---	01 - Outerlayer	90.1199			%	
01	7	Coat	Wallthickness Singletal	VCP	---	01 - Outerlayer	0.8643			mm	
01	8	Coat	Wallthickness Singletal	VCP	---	01 - Outerlayer	0.9217			mm	
01	9	Coat	Wallthickness Singletal	VCP	---	01 - Outerlayer	0.9590			mm	
01	10	Coat	Wallthickness Singletal	VCP	---	01 - Outerlayer	0.9534			mm	
01	11	Coat	Wallthickness Singletal	VCP	---	01 - Outerlayer	0.9254			mm	
01	12	Coat	Wallthickness Singletal	VCP	---	01 - Outerlayer	0.9263			mm	
Layer: 05 - Innerlayer											
05	13	Coat	min Wallthickness	VCP	---	05 - Innerlayer	0.7754			mm	
05	14	Coat	avg Wallthickness	VCP	---	05 - Innerlayer	0.8178			mm	
05	15	Coat	Wallthickness max	VCP	---	05 - Innerlayer	0.8637			mm	
05	16	Coat	avg outer Diameter (Contur)	VCP	---	05 - Innerlayer	11.4911			mm	
05	17	Coat	inner Diameter (WPs)	VCP	---	05 - Innerlayer	9.8532			mm	
05	18	Coat	Concentricity (mm/100mm)	VCP	---	05 - Innerlayer	89.5680			%	
05	19	Coat	Wallthickness Singletal	VCP	---	05 - Innerlayer	0.7754			mm	
05	20	Coat	Wallthickness Singletal	VCP	---	05 - Innerlayer	0.8215			mm	
05	21	Coat	Wallthickness Singletal	VCP	---	05 - Innerlayer	0.8616			mm	
05	22	Coat	Wallthickness Singletal	VCP	---	05 - Innerlayer	0.8657			mm	
05	23	Coat	Wallthickness Singletal	VCP	---	05 - Innerlayer	0.7972			mm	

ASK US FOR A PERSONAL OFFER.

✉ [VisioCablePro.Sales@iimAG.de](mailto:VisioCablePro.Sales@iimAG.de)

☎ +49 (3681) 45519-0

🌐 [www.cable-measurement.com](http://www.cable-measurement.com)

\* The VELOX software is suitable for the measuring device AlphaOne and the cable measuring devices of the VCPX5 series (after individual check by iIM AG)